RAVELLE

ENGINEERED EUROPEAN OAK

PRODUCT SPECS

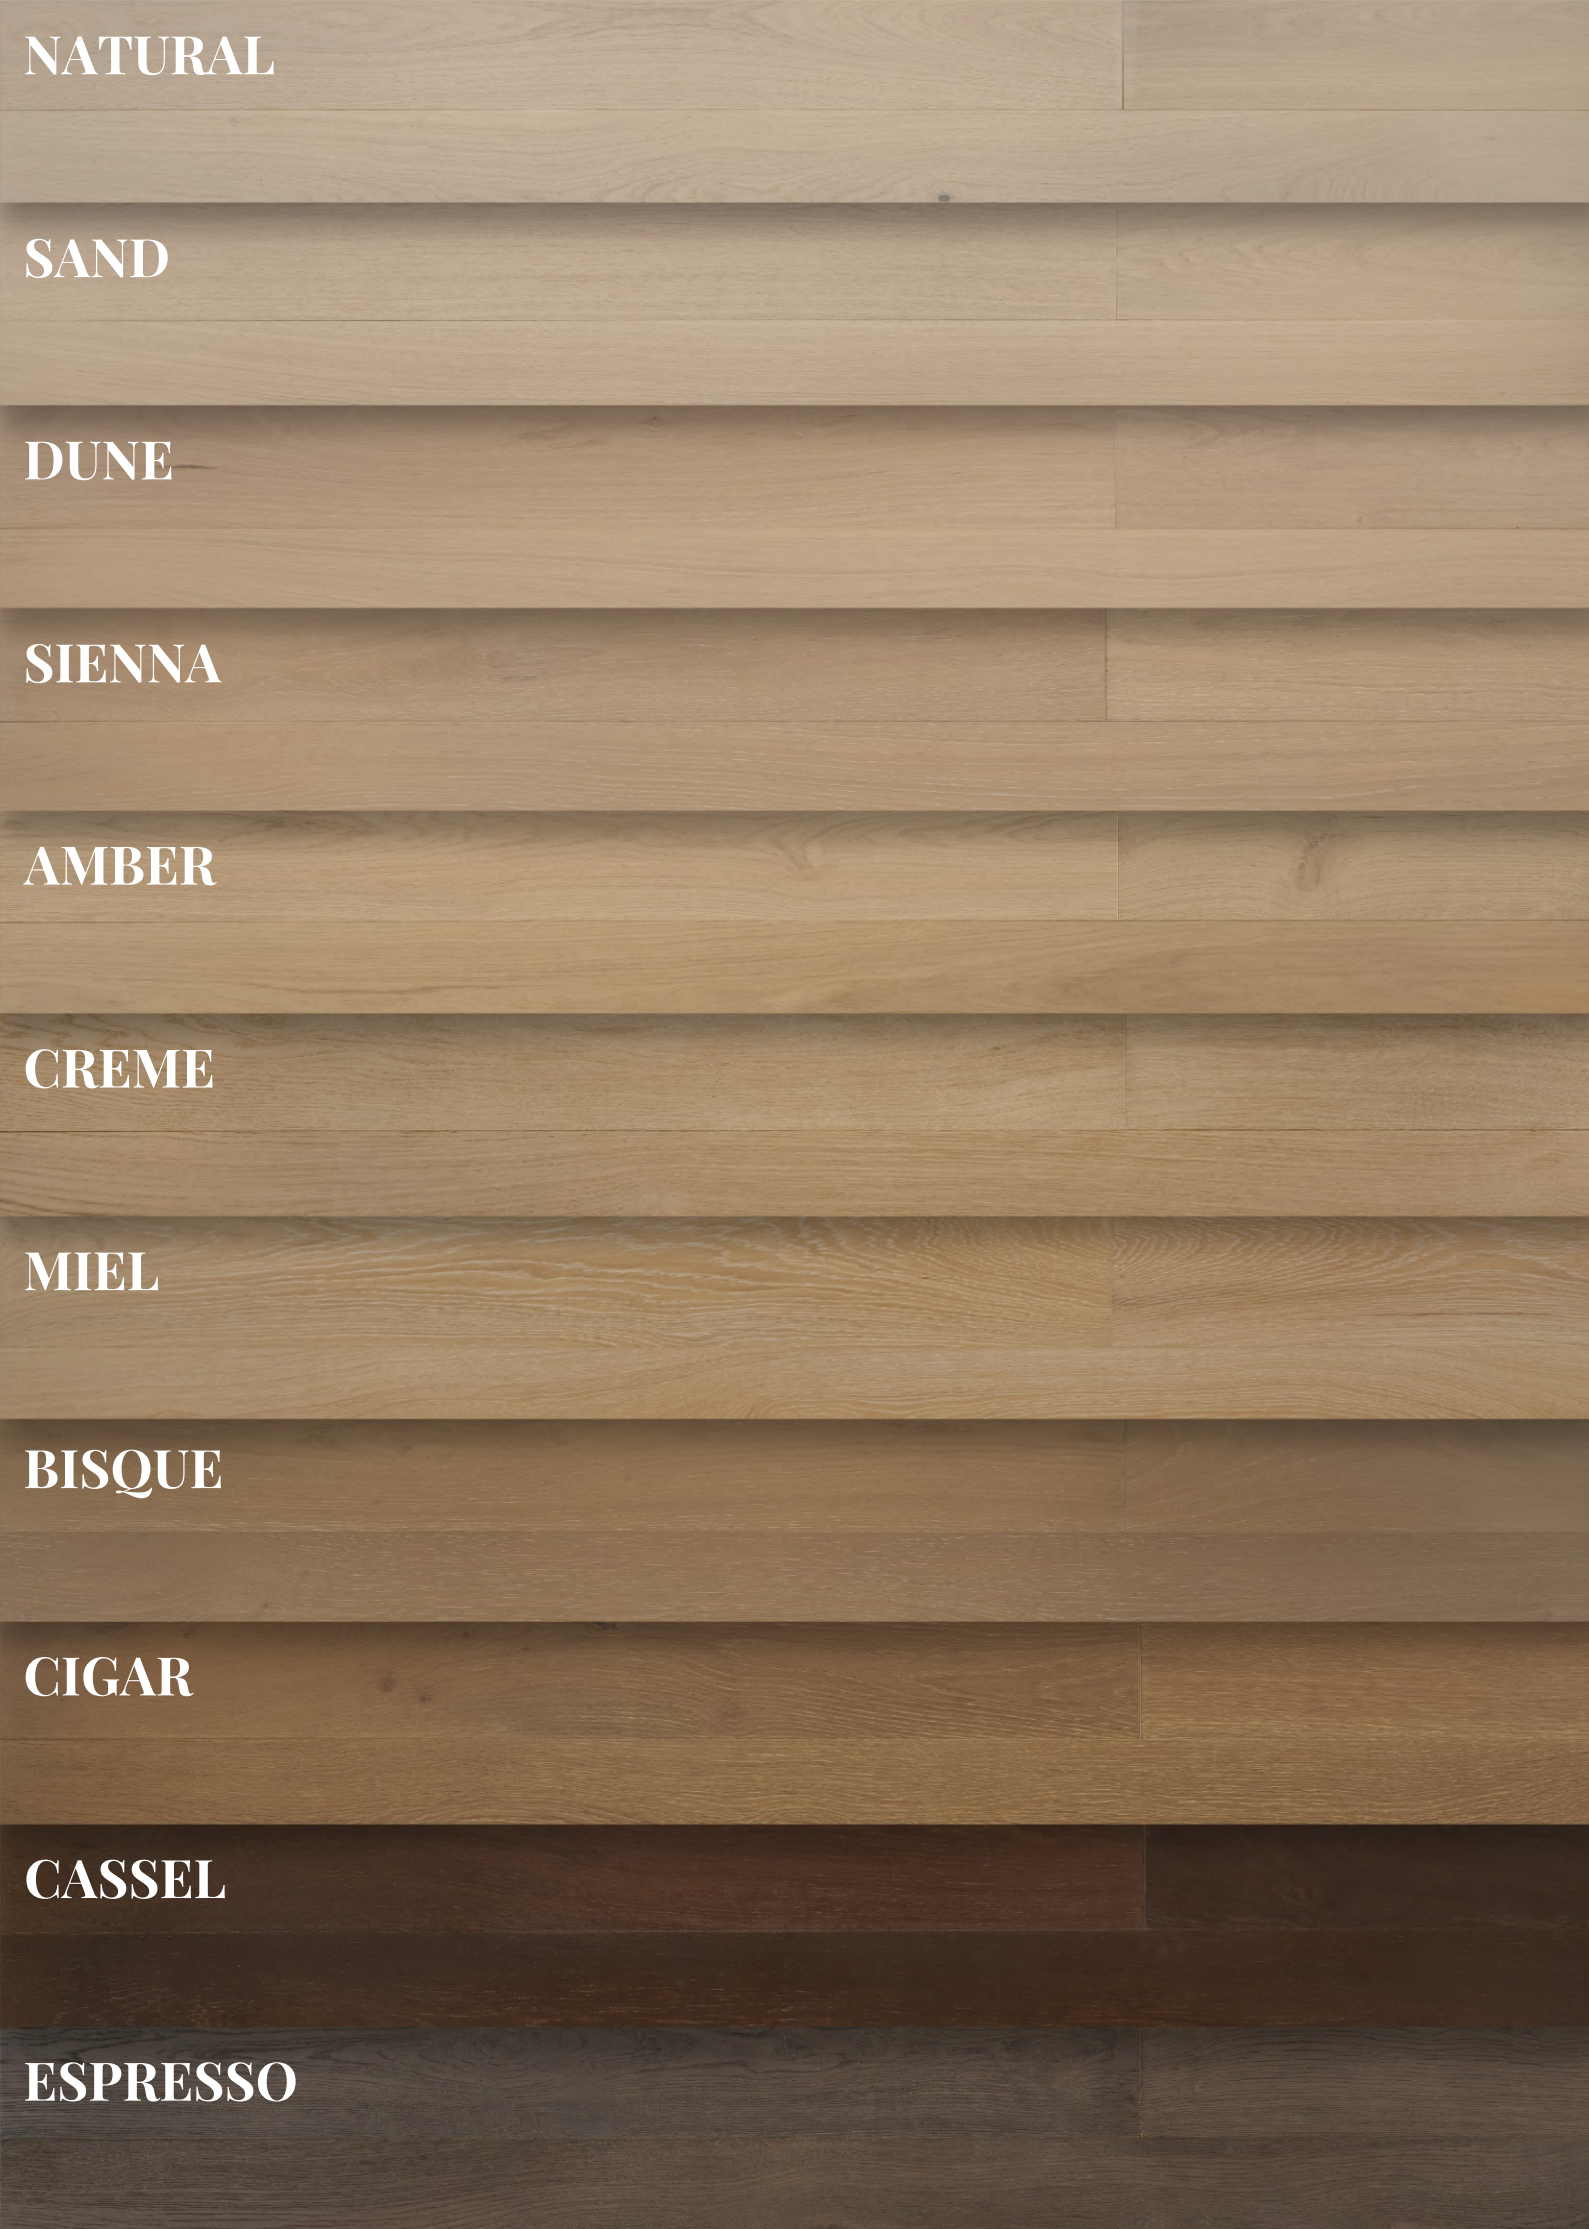
NATURAL
SAND
DUNE
SIENNA
AMBER
CREME
MIEL
BISQUE
CIGAR
CASSEL
ESPRESSO

FORMA

NATURAL

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)
SELECT (AB)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING



CHEVRON 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
27.2” (690 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



HERRINGBONE 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
23.6” (600 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH



FORMA

SAND

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)
SELECT (AB)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING



CHEVRON 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
27.2” (690 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



HERRINGBONE 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
23.6” (600 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH



FORMA

DUNE

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING



CHEVRON 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
27.2” (690 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



HERRINGBONE 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
23.6” (600 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | **FINISH**

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | **FINISH**



FORMA

SIENNA

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING





RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH

FORMA

AMBER

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)
SELECT (AB)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING



CHEVRON 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
27.2” (690 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



HERRINGBONE 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
23.6” (600 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH



FORMA

CREME

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CLASSIC (ABC)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING





RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH

FORMA

MIEL

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)



WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING



RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH

FORMA

BISQUE

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING





RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH

FORMA

CIGAR

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING





RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH

FORMA

CASSEL

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING





RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH

FORMA

ESPRESSO

SPECIES
EUROPEAN OAK

CONSTRUCTION
ENGINEERED

CORE MATERIAL
EUCALYPTUS PLYWOOD

SAWING METHOD
PLAIN SAWN

EDGE PROFILE
TONGUE & GROOVE

EDGE DETAIL
MICRO-BEVELED

SURFACE TEXTURE
WIRE-BRUSHED

FINISH
MATTE UV LACQUER

PLANK 9.5”

CHARACTER (ABCD)

WIDTH
9.5” (240 MM)

THICKNESS
5/8” (15 MM)

LENGTH
86.6” (2200 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN, FLOATING



CHEVRON 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
27.2” (690 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



HERRINGBONE 5”

CLASSIC (ABC)

WIDTH
5” (125 MM)

THICKNESS
5/8” (15 MM)

LENGTH
23.6” (600 MM)

WEAR LAYER
4 MM

INSTALLATION
GLUE DOWN



RAVELLE
RAVELLE.COM

WARRANTY

RESIDENTIAL (LIMITED)
25 INSTALLATION
STRUCTURE | FINISH

COMMERCIAL (LIMITED)
10 INSTALLATION
STRUCTURE | FINISH



RAVELLE

@LIVERAVELLE

(818) 881-7421

RAVELLE.COM

INFO@RAVELLE.COM

21328 LASSEN ST.
CHATSWORTH, CA 91311